

UNILUMIN UPAD III


PRODUCT OVERVIEW

SPECIFICATION

2.6mm LED Videowall Solution ▼

Unilumin's UPAD III is our most commonly rented panel. It allows for a number of arrangements similar to our Desay X-Series.


RESOLUTION	192px x 192px
WEIGHT	9 KG
MAX POWER DRAW	120 W
BRIGHTNESS	1,000 nits
INGRESS PROTECTION	IP 44
OPTIMAL VIEW DISTANCE	2.6m
PIXEL PITCH	2.6mm
DIMENSIONS	500mm x 500mm x 76mm

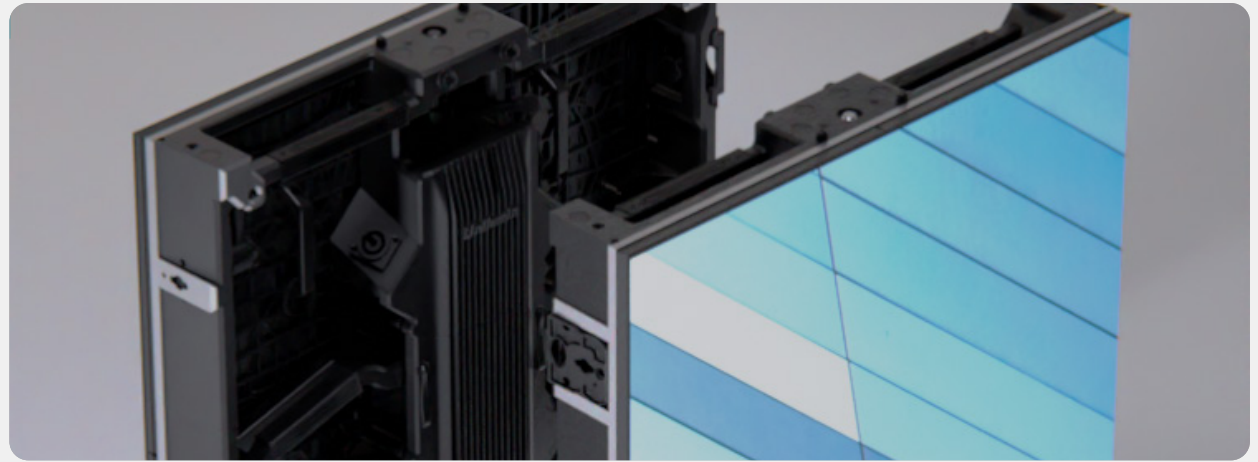

USE CASES


GROUNDSTACK ▼

These panels can be utilised in a groundstack arrangement, allowing for large areas of LED at ground-height at your exhibit.

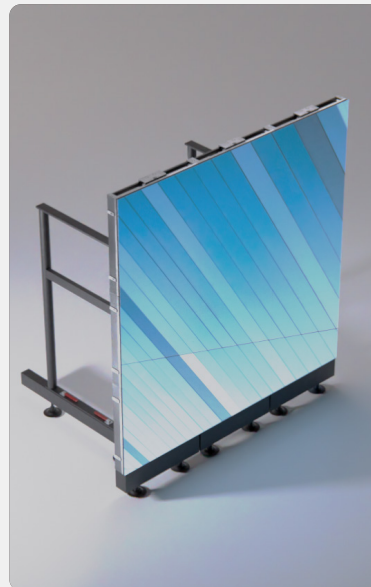


SEAMLESS CORNER ▼

The Upad III can achieve a seamless 90 degree corner without the use of a joined cabinet, meaning corners can be put together panel by panel.

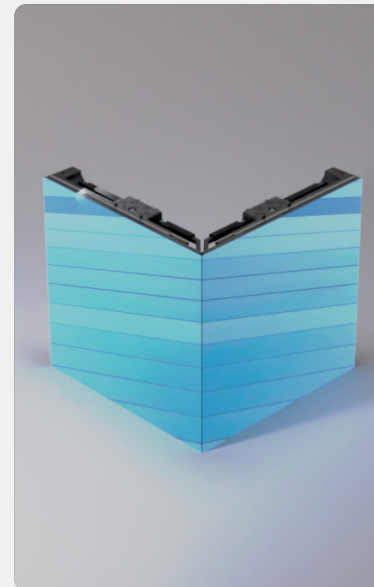

FACETED CURVE ▼

By utilising angled blocks, the Upad III panels can create a curve with multiple cabinets, creating a curved wall over a large area.

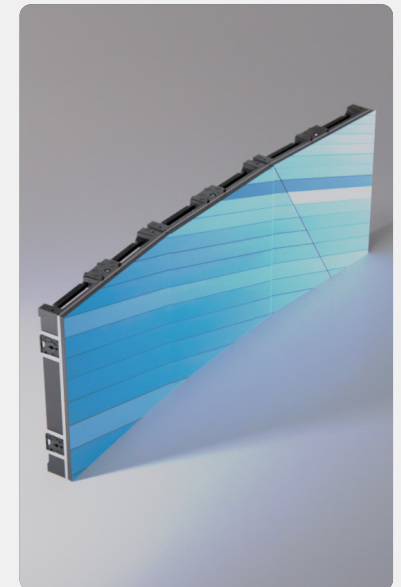

CABINET DIMENSIONS

For more information, please get in touch with us:
sales@dbpixelhouse.com | +44 (0)345 226 3083

