

# UNILUMIN UPAD IV-S

## PRODUCT OVERVIEW

## SPECIFICATION

### 2.6mm LED Videowall Solution ▼

The Unilumin UPAD IV-S is an LED videowall solution that features a versatile curvable unit that can be used to create tight curves and unique arrangements that no other panel can accomplish.

INGRESS PROTECTION	IP 4
OPTIMAL VIEW DISTANCE	2.6m
PIXEL PITCH	2.6mm
MAXIMUM PANEL CURVE	+40° / -40°
RESOLUTION	192px x 192px
WEIGHT	7.7 KG
POWER DRAW	45 W
DIMENSIONS	500mm x 500mm x 80mm



## USE CASES


### WAVE ▼

By combining 2 or more panels and inverting the curves as they are built, a wave formation can be created.




### CIRCLE ▼

A circle can be achieved with 9 panels and can be stacked to create totems and flying arrangements

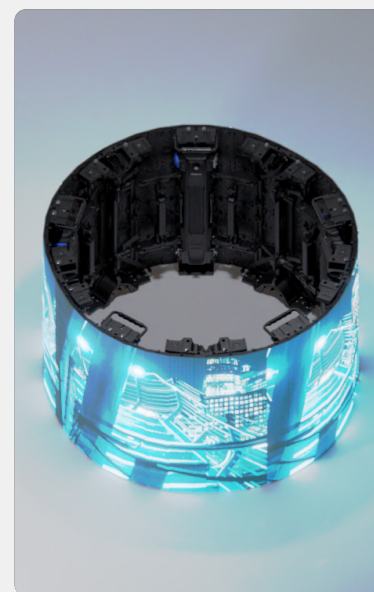

### TIGHT CURVE ▼

The UPAD IV-S panels can curve up to 40 degrees, meaning a tight curve can be achieved with minimal panels

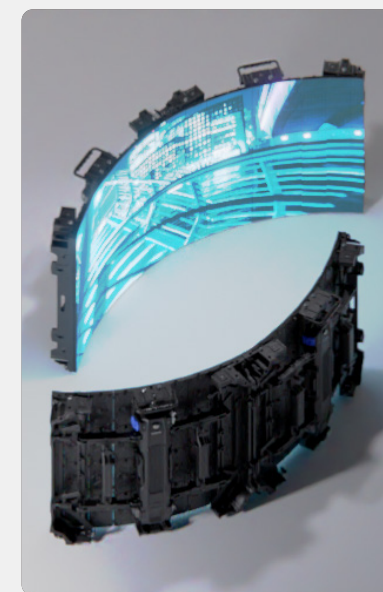

# CABINET DIMENSIONS

For more information, please get in touch with us:  
[sales@dbpixelhouse.com](mailto:sales@dbpixelhouse.com) | +44 (0)345 226 3083

